

RECTANGULAR


HYDRASEP[®]

ADVANCED OIL/WATER SEPARATOR

Oil/Water Separators

**NO MESHES
NO COALESCERS**

**R
E
L
I
A
B
I
L
I
T
Y**

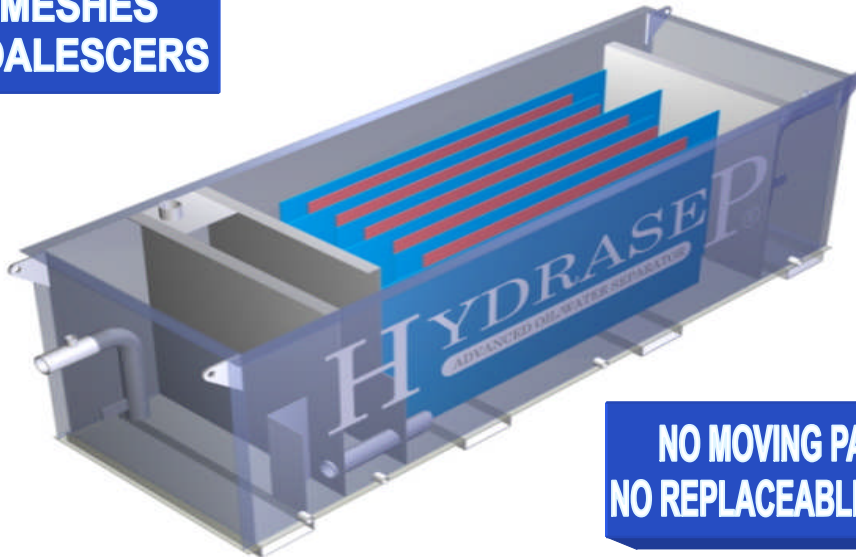

**P
E
R
F
O
R
M
A
N
C
E**

**NO MOVING PARTS
NO REPLACEABLE PARTS**

The patented Hydrasep[®] oil water separator is designed to remove free floating oil, grease and settleable contaminants from oily water flows without the use of filters, meshes and/or inclined plate coalescers, which all require regular maintenance. The Hydrasep units meet or exceed federal, state and local grease/oil discharge requirements while being virtually maintenance free.

Model	Flow Rate (gpm)	Oil Capacity (gal.)	Dimensions	Inlet / Outlet dia.	Operating Volume (gal.)	Empty Weight (lbs)	Operating Weight (lbs)
HS-100-RCT	10	25	5' 0" L x 2' 3" W x 2' 9" H	1 1/2"	95	475	1,268
HS-200-RCT	15	57	4' 4" L x 4' 0" W x 3' 2" H	2"	174	1,055	2,507
HS-370-RCT	30	127	9' 1" L x 4' 0" W x 3' 9" H	2 1/2"	393	1,750	5,030
HS-630-RCT	45	236	10' 0" L x 5' 0" W x 4' 4" H	3"	758	2,500	8,825
HS-1000-RCT	81	473	13' 1" L x 4' 0" W x 3' 11" H	4"	973	3,400	11,517
HS-2000-RCT	171	1,070	19' 3" L x 4' 0" W x 4' 6" H	6"	1,792	5,012	19,961
HS-3000-RCT	235	1,210	21' 3" L x 5' 0" W x 5' 0" H	6"	2,363	7,094	26,807
HS-5000-RCT	406	1,750	25' 6" L x 5' 1" W x 6' 0" H	8"	4,234	12,354	47,675
HS-8000-RCT	645	2,300	28' 10" L x 8' 1" W x 8' 9" H	10"	6,954	20,400	78,410

The base unit includes the separator only. However, all units can be equipped with the following standard options along with any other specialized options customers may require:

- Oil Pumping Chamber
- Sludge Hopper
- Legs
- Discharge Pumps
- Sump pumps
- Oil Pumps
- Special internal/external coatings
- Catwalks
- Oil Level Sensors
- Automatic Controls
- Galvanized/SS/Poly internals/construction
- External Insulation/Heating System

HYDRASEP[®]

ADVANCED OIL/WATER SEPARATOR

U.S. Patent 5,266,191
www.hydrasep.com

© 2003